

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A47B 37/04	A1	(11) International Publication Number: WO 96/17538 (43) International Publication Date: 13 June 1996 (13.06.96)
------------------------------------------------------------------------------	-----------	---------------------------------------------------------------------------------------------------------------------------

(21) International Application Number: PCT/GB95/02789

(22) International Filing Date: 30 November 1995 (30.11.95)

(30) Priority Data:

9424646.9	7 December 1994 (07.12.94)	GB
9517360.5	24 August 1995 (24.08.95)	GB

(71) Applicant (for all designated States except US): GARODGE LTD. [GB/GB]; 52 North Gate, London NW8 7EH (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): MINDELL, Bertram [GB/GB]; 17 Beaufort Road, London W5 3EB (GB).


(74) Common Representative: MINDELL, Bertram; 17 Beaufort Road, London W5 3EB (GB).

(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW, SD, SZ, UG).

Published

*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: RECEPTACLE

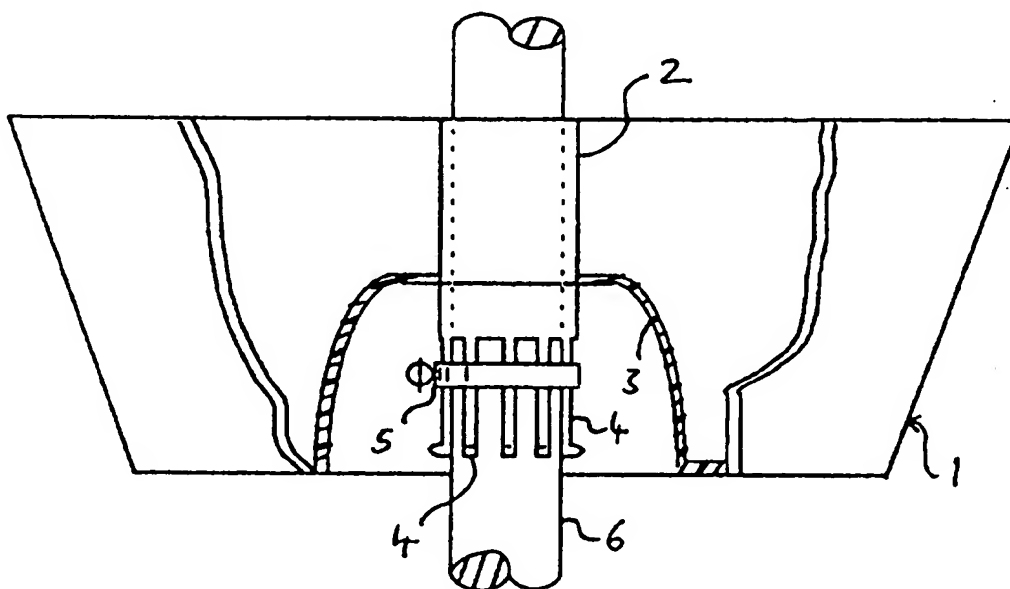

(57) Abstract

A receptacle (1) which may contain food or drinks or may be a plant container, for example, is provided with an upright central locating tube (2) which is attached to an aperture in a recess (3) in its base and is mounted on e.g. a parasol pole (6) by means of a jubilee clip (5) which encircles and grips spring fingers (4) which extend from the bottom end of the locating tube. The above clamping arrangement is concealed within the recess (3) and hence the appearance is enhanced. In a further embodiment, the spring fingers are omitted and the locating tube is provided with apertures above and below the surrounding region of the base which enable the receptacle to be attached to the supporting pole by pegs or threaded fixing means and, when the receptacle is dismantled from the pole, function as drainage and/or ventilation holes.

Best Available Copy

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Receptacle

The present invention relates to a receptacle which can be supported on an upright member. The receptacle may for example be a flat dish, a shaped dish, a bowl, a vase, a planter, a plant pot, a napkin holder, a condiment holder, an ice-bucket or a bird bath.

The invention relates particularly but not exclusively to a receptacle which can be supported on a parasol pole or umbrella pole.

Patio tables and larger tables used in cafes, beer gardens and at garden parties are generally provided with a hole in the top surface, usually in the centre of the table, to receive the pole of a parasol.

It would be desirable to provide a receptacle for such tables which could be located in the centre of the table, making use of an area of the table which is sometimes difficult to reach.

GB 2,246,291A discloses such a tray for use with an umbrella or parasol, the tray having a central aperture in its base which is attached to a supporting tube extending downwardly towards an aperture in a table. The lower end of the tube is fixed to the aperture in the table and the parasol or umbrella pole extends upwardly through the aperture in the table and through the tube and projects upwardly from the aperture in the tray.

However the above arrangement can only be used with tables having an aperture of a size corresponding to the diameter of the tube and furthermore the height of the tray is fixed in relation to the height of the table. Moreover parasol poles are used not only in conjunction with a patio table or garden table but also in a free-standing manner for example in purpose-built bases or supported in soil or sand. The above tray arrangement is unsuitable for use with a free-standing pole.

Accordingly the present invention provides a receptacle having an aperture formed in a recess in the underside of its base, an upright locating tube extending from and having its bore aligned with said aperture, said locating tube having supporting means arranged to engage an upright receptacle-supporting member extending

through said locating tube whereby said receptacle can be supported in an elevated position by said receptacle-supporting member, the upper end of said locating tube being located above the base.

5 Preferably said supporting means is located within and concealed by said recess.

Preferably said supporting means is removable from said locating tube.

10 Preferably the upright locating tube projects below at least the highest part of the base.

15 The supporting means may be separate from or integral with the locating tube, and preferably comprises a clamp which may be mounted either on the locating tube or on the parasol pole or other upright receptacle-supporting member, for example.

The locating tube is conveniently moulded integrally with the base of the receptacle but alternatively a separate locating tube can be used.

20 In a preferred embodiment said supporting means and tube do not extend beneath the lowest portion of the base whereby the receptacle can be supported on a flat surface, i.e. quite independently of any supporting pole.

25 The receptacle is conveniently made of plastics material e. g. polypropylene but it is envisaged that other materials such as china, porcelain, terracotta, earthenware, pottery, wood, metal or glass may alternatively be used.

30 The invention also encompasses an umbrella or parasol having the receptacle of the invention supported on its pole.

Preferred embodiments of the invention are described below by way of example only with reference to Figures 1 to 7 of the accompanying drawings, wherein:

35 Figure 1 is an elevation, partly in section of one receptacle in accordance with the invention,

40 Figure 2 is an elevation, partly in section, of another receptacle in accordance with

the invention,

Figure 2A is an elevation, partly in section, showing a variant of the clamping arrangement of Figure 2,

5

Figure 3 is an elevation showing a parasol provided with a receptacle in accordance with the invention;

10

Figure 4 is an elevation, partly in section of a further receptacle in accordance with the invention, supported on a flat surface;

Figure 5 is an elevation , partly in section, of a further embodiment of the invention;

15

Figure 6 is an end elevation of a drainage tube for use in the arrangement of Figure 5, and

Figure 7 is an elevation of a screwing arrangement in a further embodiment.

20

Referring to Figure 1, the illustrated receptacle 1 is shown partly cut away to reveal a recess 3 in its base, which accommodates an integral locating tube 2 which is fitted through an aperture in the centre of the recess and extends upwardly to the open top of the receptacle. The locating tube 2 terminates in resilient spring fingers 4 which are urged against an upright supporting pole 6 by a Jubilee® clip 5. The distal tips of the spring fingers 4 project radially outwardly and thereby prevent the Jubilee® clip from slipping off when it is unfastened.

25

30

The locating tube 2 and main body of the receptacle 1 are formed from suitable plastics material such as polypropylene although other materials may be employed, particularly for the locating tube 2, in order to provide the required friction and resilience.

35

The locating tube 2 and especially its spring finger portion may optionally be lined with suitable gripping material such as rubber or the like in order to enable the receptacle to be securely located without damaging the surface of the supporting pole 6. Replacable sleeves of gripping material may be provided in a variety of thicknesses in order to allow a locating tube of standard size to engage with upright

40

receptacle-supporting members of various diameters and profiles.

It will be apparent that the described clamping arrangement is effectively concealed by the recess 3, thereby enhancing the appearance of the receptacle, which will normally be located below eye level and may contain food or drink, flowers, or soil and plants for example.

As an alternative or in addition to the clamping arrangement shown in Figure 1 a similar Jubilee® clip may be fitted around the upper portion of locating tube 2 within the receptacle, and this may be hidden from view by the contents (e.g. soil) of the receptacle.

Figure 2 shows a variant in which the spring fingers 4 are replaced by a recessed portion 2A of the locating tube 2 and a sleeve 7 of flexible material (preferably rubber or other elastomeric material) fitted round this recessed portion protrudes from the lower end of the locating tube. The protruding end of this sleeve is clamped around supporting pole 6 by a Jubilee® clip 5. This arrangement is especially suitable for supporting receptacles having integral locating tubes of relatively brittle material such as porcelain or terracotta for example.

In the variant shown in Figure 2A the sleeve 7 is attached to an inner sleeve portion 7' which is located beneath the lower end of the locating tube. The wall thickness of inner sleeve portion 7' is similar to that of the locating tube and hence the strain on the sleeve 7 is reduced in comparison with the arrangement shown in Figure 2.

In some cases a sufficiently secure fixing may be achieved merely by clamping a clamp (such as a jubilee clip for example) around a sleeve fitted around the supporting pole and resting the lower end of the locating tube on the upper surface of this sleeve.

A lid (not shown) having a slot to enable it to be fitted around the parasol pole may also be provided in order to protect the contents of the receptacle.

In another embodiment (not shown) the receptacle may be in the form of a dish or tray with one or more cut-out portions in its edge which are adapted to receive and retain wineglasses or other receptacles for food or drink.

Figure 3 shows a receptacle 1 (as described with reference to Figure 1 or Figure 2 for example) supported on the supporting pole 6 of a parasol 9, the supporting pole extending through a central aperture in a table 8. It will be apparent that the receptacle 1 is protected against theft because it can only be removed by lifting the parasol 9 and/or its pole 6.

This feature of the invention is especially advantageous in situations where the receptacle is exposed in public places. In particular it is envisaged that the receptacle of the invention may be provided with an enlarged locating tube enabling it to be fitted over a large pole such as a lamppost for example.

Figure 4 shows a receptacle 1 in accordance with the invention wherein the locating tube 2 is provided with upper apertures 10 and lower apertures 11 above and below the adjoining region of the base respectively. Pegs or threaded fixing means (not shown) can be inserted through apertures 10 and/or apertures 11 to engage holes in the supporting pole(not shown) or to screw into the supporting pole.

However in Figure 4 the receptacle is shown supported on a flat surface 12 rather than being mounted on a pole, and accordingly the lower end of tube 2 is capped with a cap 14 which is suitably formed from resilient plastics material. Alternatively the upper end of tube 2 may be capped.

The apertures 10 also enable water to drain from the receptacle and also provide a degree of ventilation. It will be appreciated that several apertures may be provided e.g. in a circular array for this purpose. Such a receptacle is particularly suitable for use as a planter.

Referring to Figure 5, the pot 1' is intended to be used as a planter and is suitably formed of injection-moulded polypropylene and has a ribbed exterior as shown. A stepped recess 3' has its inner portion supported by four regularly spaced radial webs 19 (only two of which are visible in Figure 5) and the innermost portion of the pot wall is generally frusto-conical and terminates in an integral array of spring fingers 4' which are urged against supporting pole 6 by a jubilee clip 5. The pot is filled with soil (not shown). The webbed inner portion of the receptacle separates the soil (not shown) in the receptacle from the pole 6. In particular there is a space in the region between the innermost frusto-conical portion of the receptacle and the pole 6.

A drainage tube 15 is provided as a separate part and comprises a plastic tube 17 moulded integrally with two fingers 16 which are of generally triangular cross-section as shown in Figure 6. These grip the underside of one of the webs 19 which fits into a slot 18 between them. In this position, as shown in figure 5, the plastic tube 17 has its upper, radially outer end fitted through an aperture in an edge of the pot and its lower, radially inner end fitted between two adjacent spring fingers 4'. Hence any excess water in the soil drains away to the surface of the parasol pole and runs down through the hole of a table (not shown) without spilling onto the table surface.

In the variant shown in Figure 7, a nut 13, suitably of polyamide, has an upper threaded bore portion 21 which can screw onto an external threaded portion 20 of locating tube 2 and, when screwed on to the locating tube, urges the array of spring fingers 4 against the parasol pole 6 by means of an unthreaded lower tapered portion 22 and thereby supports the pot by frictional engagement of the spring fingers with the parasol pole.

Claims

1. A receptacle having an aperture formed in a recess in the underside of its base, an upright locating tube extending from and having its bore aligned with said aperture, said locating tube having supporting means arranged to engage an upright receptacle-supporting member extending through said locating tube whereby said receptacle can be supported in an elevated position by said receptacle-supporting member, the upper end of said locating tube being located above the base.

2. A receptacle as claimed in claim 1 wherein said supporting means is located within and concealed by said recess.

3. A receptacle as claimed in claim 1 or claim 2 wherein said supporting means is removable from said locating tube.

4. A receptacle as claimed in any preceding claim wherein said supporting means comprises a clamping arrangement which in use attaches said locating tube to said upright receptacle-supporting member.

5. A receptacle as claimed in claim 4 wherein said clamping arrangement comprises a generally circular clamp which can be tightened around resilient spring fingers extending downwardly from said tube.

6. A receptacle as claimed in claim 4 or claim 5 wherein said clamping arrangement is located above the base of the receptacle and clamps the locating tube against said upright receptacle-supporting member.

7. A receptacle as claimed in claim 5 or claim 6 wherein said locating tube has an external threaded portion and said clamping arrangement comprises a nut which can be screwed onto said threaded portion to urge the spring fingers radially inwards.

8. A receptacle as claimed in any of claims 4, 5 and 6 wherein said locating tube is provided with gripping material on its inner surface.

9. A receptacle as claimed in claim 4 wherein said clamping arrangement comprises a sleeve of elastomeric material which engages said tube and is adapted to grip said

upright receptacle-supporting member.

10. A receptacle as claimed in claim 9, further comprising a generally circular clamp which can be tightened around a portion of said sleeve which extends beyond said tube to grip said upright receptacle-supporting member.

11. A receptacle as claimed in any of claims 1 to 3 wherein said supporting means comprises one or more apertures in said locating tube through which are fitted one or more peg members or threaded fixing means.

12. A receptacle as claimed in any of claims 1 to 3 wherein said supporting means comprises a sleeve fitted around said receptacle-supporting member and said locating tube rests on the upper end of said sleeve.

13. A receptacle as claimed in any preceding claim wherein said supporting means and tube do not extend beneath the lowest portion of the base whereby the receptacle can be supported on a flat surface.

14. A receptacle as claimed in claim 13 further comprising a cap fitted to an end of said tube.

15. A receptacle as claimed in any preceding claim wherein said locating tube extends upwardly from the base towards the mouth of the receptacle.

16. A receptacle as claimed in any preceding claim wherein said locating tube is moulded integrally with the base of the receptacle.

17. A receptacle as claimed in any preceding claim which is constructed, shaped and dimensioned to be used as a container for food or drink, decoration or plants.

18. A receptacle as claimed in any preceding claim wherein a drainage tube is arranged to drain water from the receptacle to the vicinity of said supporting means.

19. A receptacle as claimed in claim 18 wherein said drainage tube extends within a central recess in the underside of said base.

20. A receptacle as claimed in claim 19 wherein said drainage tube is attached to a web in said recess.




21. A receptacle as claimed in any preceding claim wherein one or more cut-out portions are provided at the edge thereof which are adapted to support a receptacle for food or drink.



22. A receptacle as claimed in any preceding claim wherein one or more apertures for drainage are provided in said locating tube above the level of the base.




23. A parasol or umbrella having a receptacle as claimed in any preceding claim supported on its pole.

24. A receptacle substantially as described hereinabove with reference to any of Figures 1, 2, 2A, 4, 5, 6 and 7 of the accompanying drawings.

25. A parasol arrangement substantially as described hereinabove with reference to Figure 3 of the accompanying drawings comprising a receptacle as claimed in any of claims 1 to 22 or claim 24.

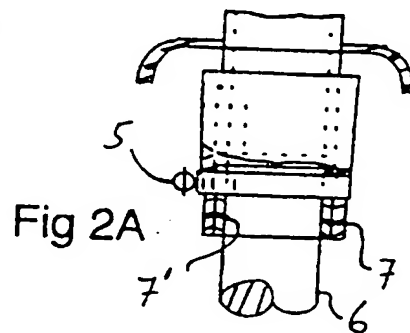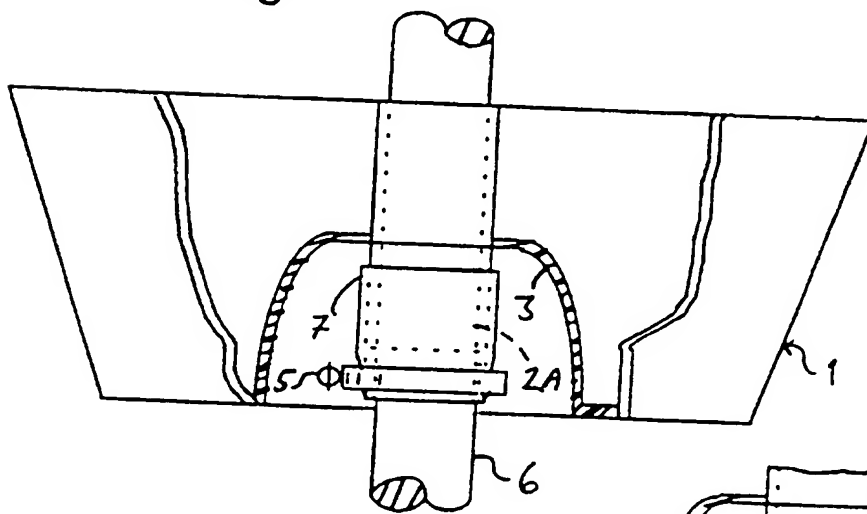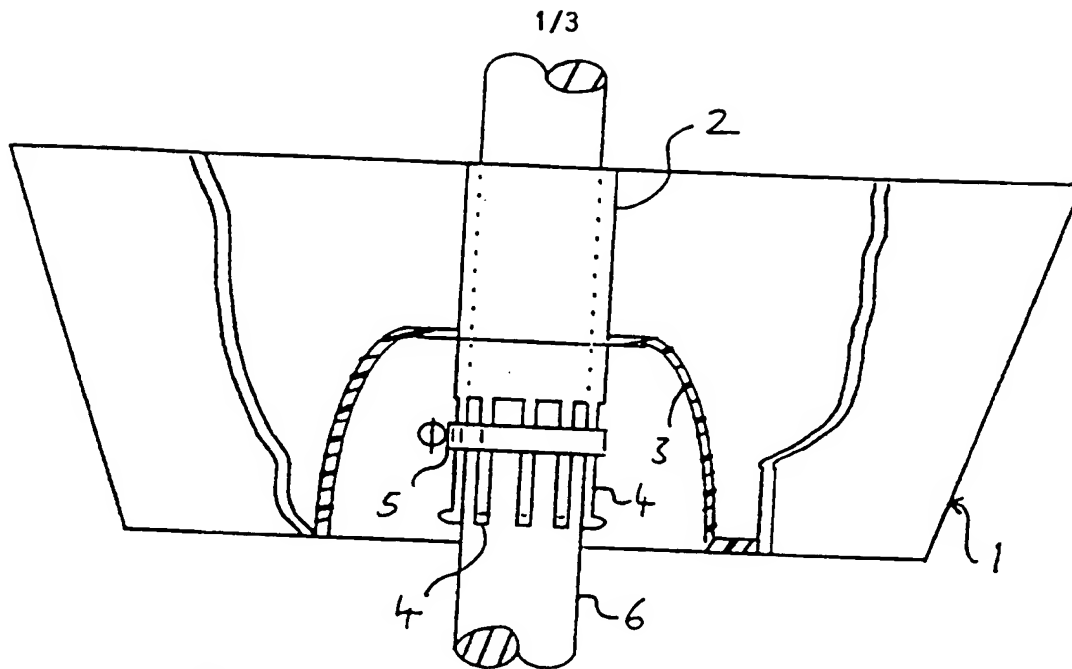

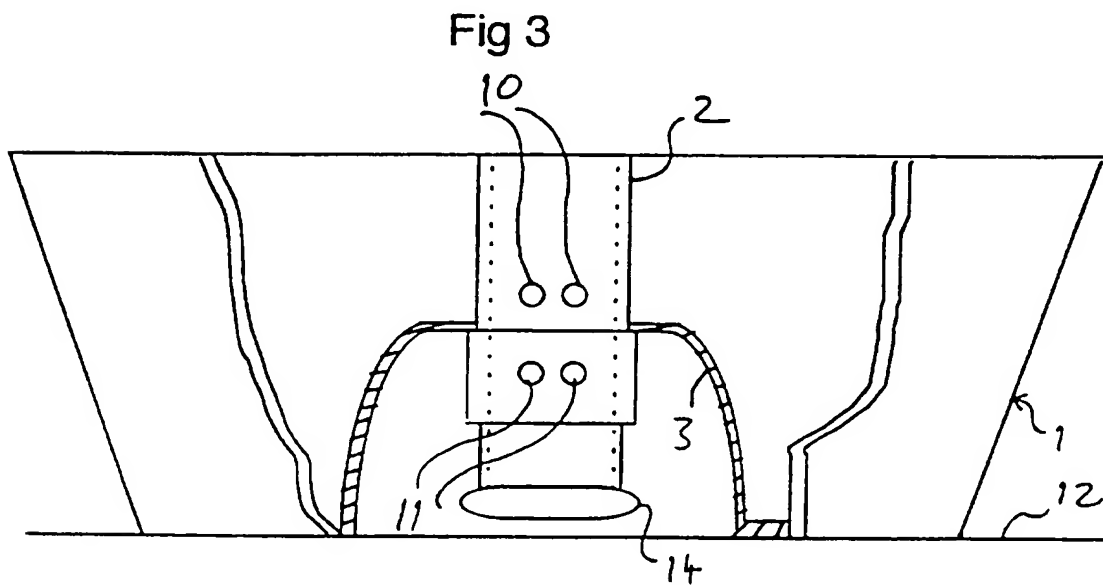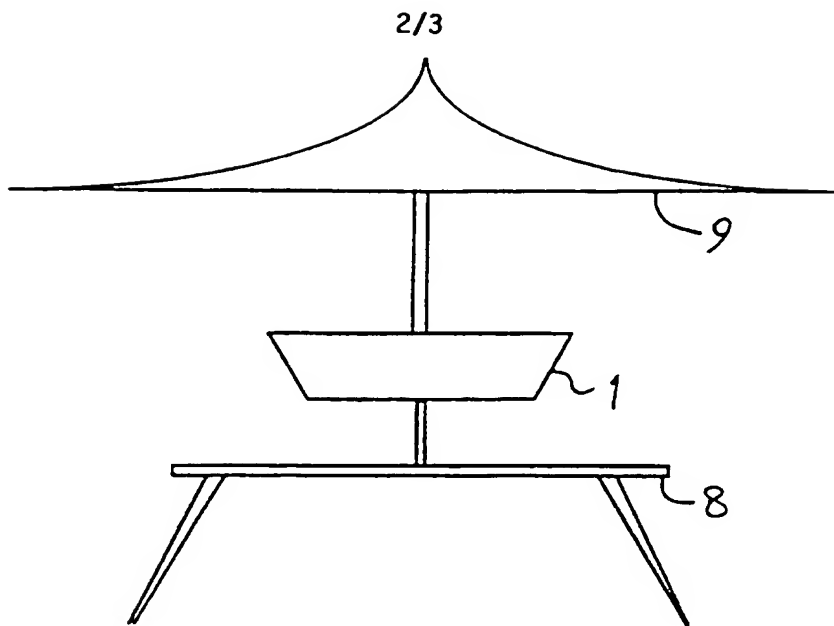

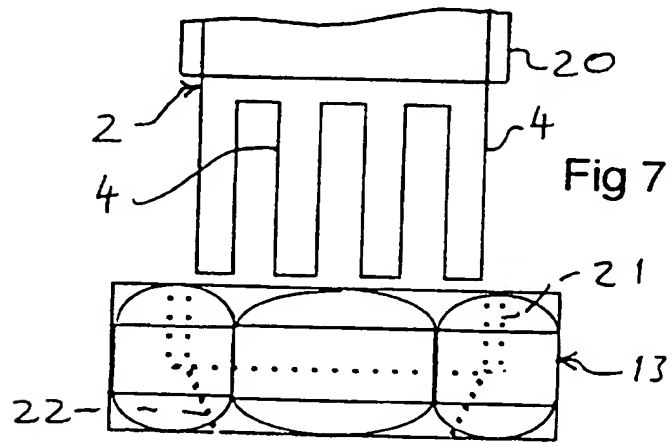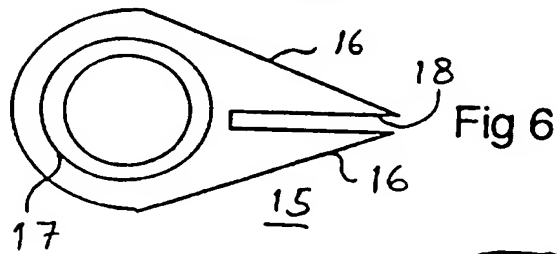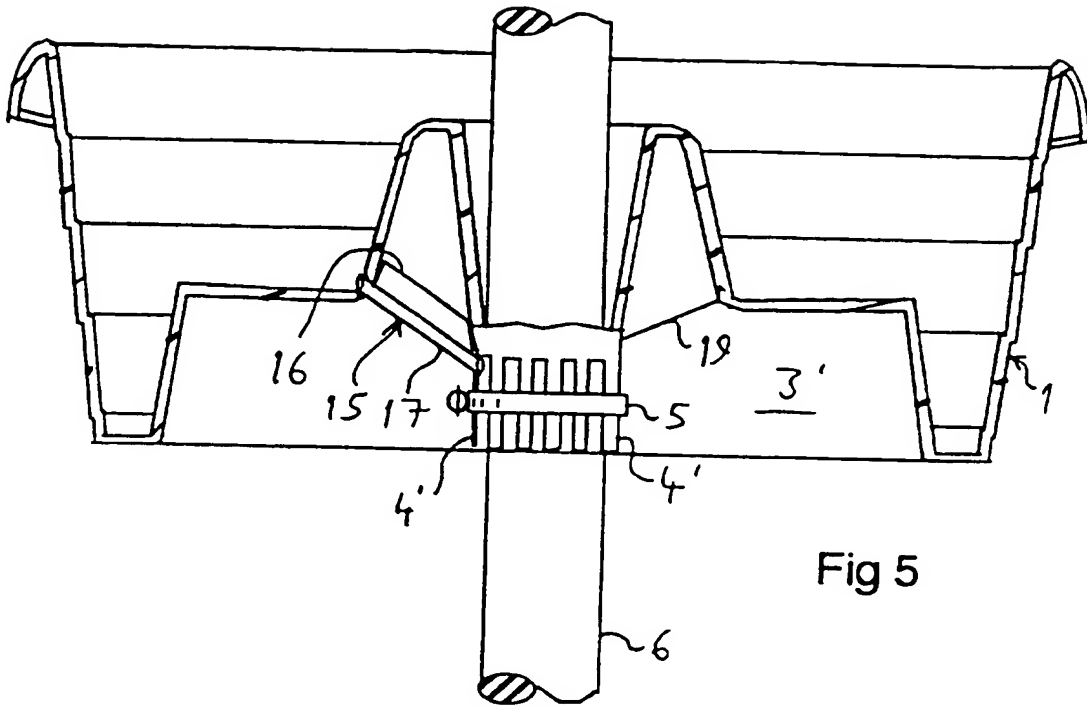

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A47B37/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 A47B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE,A,27 29 880 (OSKAR WINKLER KG FORMHOLZ- UND KUNSTSTOFFWERK) 18 January 1979	1
A	see page 26, paragraph 3 - page 27, paragraph 3; claim 1; figures 9,10	2-10, 23-25
A	US,A,4 597 221 (CREATIVE PLANTERS INC) 1 July 1986 see the whole document	1-25
A	GB,A,2 257 624 (RICHARD ALLA MORRIS) 20 January 1993 see the whole document	1

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *&* document member of the same patent family

Date of the actual completion of the international search

23 April 1996

Date of mailing of the international search report

17. 05. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Noesen, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

National Application No

PCT/GB 95/02789

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-A-2729880	18-01-79	NONE	
US-A-4597221	01-07-86	NONE	
GB-A-2257624	20-01-93	NONE	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.